MORRISTOWN DUAL FLUSH ONE-PIECE TOILET

安装之前

卡丽 KARAT 安装说明书 INSTALLATION INSTRUCTIONS

305/400MMRI WITH SOFT CLOSE SEAT 丽城双冲连体坐便器,305/400MM坑距 配缓降盖板 25952T-S-WK/25953T-S-WK

· 请小心详阅本指引。以便熟悉所需工具、材料及安装程

序。请遵照适用的章节来安装你的坐便器,以避免由于

安装不当而导致不必要的损失。除了有关正确的安装方

· 本指引所载之一切资料, 均以印刷时所有之最新产品情

况为基础,卡丽保留权利随时更改产品特性、包装或供

法之外,还务请详阅所有操作及安全指引。

应情况, 恕不另行通知。

BEFORE YOU BEGIN

- Please read these instructions carefully to familiarize yourself with the required tools, materials, and installation sequences. Follow the sections that pertain to your particular installation. This will help you avoid costly mistakes. In addition to proper installation, read all operating and safety instructions.
- All information in these instructions is based upon the latest product information available at the time of publication. Karat reserves the right to make changes in product characteristics, packaging or availability at any time without notice.
- These instructions contain important care, cleaning, and warranty information-please leave instructions for the consumer.

ORDERING INFORMATION

MORRISTOWN Single Flush One-piece Toilet 305mmRl Water Consumption/4.0L

With Slow-close Toilet Seat&cover......25952T-S-WK Slow-close Toilet Seat&cover......28183T-WK MORRISTOWN Single Flush One-piece Toilet 400mmRI Water Consumption/4.0L

With Slow-close Toilet Seat&cover......25953T-S-WK Slow-close Toilet Seat&cover.. ..28183T-WK


· 本指引也包含了有关护理、清洁及保养等重要资料-请交


定购信息 丽城双冲连体坐便器305MM坑距 用水量/4.0升 .25952T-S-WK 配缓降盖板 ..28183T-WK 缓降坐便器盖板 丽城双冲连体坐便器400MM坑距, 用水量/4.8升 .25953T-S-WK 配缓降盖板 .28183T-WK 缓降坐便器盖板

用水量说明

小档3.5L大档5.0L平均用水量4.0L为产品名义用水量计算方法依 GB/T6952-20156.2.1 项 两次小档加一次大档用水量总和除以3。

ROUGH-IN 尺寸图 单位:毫米



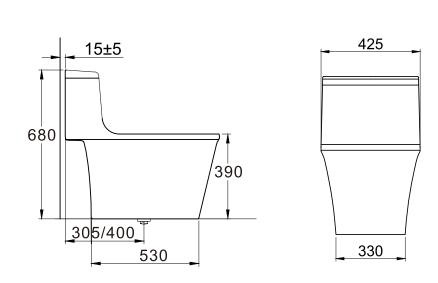

The size is for reference only, please check the actual size before installation 此尺寸仅供参考,安装前请仔细测量实际产品。

2210254-T1

TOOLS AND MATERIAL SREQUIRED (Not supplied)

- Metal file (file cut)
- Tape measure
- Tubing cutter
- Level
- Hacksaw Putty knife
- Screwdriver
- Toilet gasket (wax seal)
- Toilet supply shut-off valve

NOTICE: If the existing toilet does not have a supply shut-off valve below the tank. install one before installing the new toilet

所需工具及材料(不随货供应)

- ・ 锉刀
- * 卷尺
- · 切管刀
- 水平尺 • 钢锯
- 涂油灰刀
- 螺丝刀 坐便器垫圈(蜡封)
- · 坐便器供水管止水阅


安装

注意:如果现有坐便器的水箱下方没有止水阀,须在安装 新坐便器前装妥止水阀。

INSTALLATION

1. The center of supply valve keeps a distance of 200mm from the floor; Above the finished floor line, and 225mm to the Left of the closet flange centerline;

- 止水阀中心距地 200mm 左右, 水平方向向上, 在左边, 离法兰中心线 130~180mm。
- 注:安装角阀之前务必试水,已确保管道的畅通。




2. If replacing a toilet, remove the old wax. 如需拆除现有坐便器, 请先刮除旧的蜡环。




3. Before your install Use a pencil to trace out the position of the installation hole.Drill holes.

将坐便器的排污孔对准地面的排污孔,调整好坐便器的 位置, 用铅笔在安装孔的地方做上标记, 移开马桶, 根




4. Install the flange. 将法兰套在缸体底部。



2210254-T1

2210254-T2



Do not move after placement! Watertight seal may be broken!

放置后请勿移动! 否则会破坏防水层!

6. Install the Toilet

Do not overtighten!

地面上。不要拧的太紧


Installation set

7. Flush several times and check for leaks.

冲水数次, 检查进水管是否漏水

5. Apply weight evenly.

均匀的将坐便器下压。



如图所示, 使用螺栓、垫圈和螺母将坐便器固定到

NOTE: Do not lift or rock the toilet when toilet is placed in

注意: 坐便器放好后, 不可再提起晃动, 否则会损坏密封

position, otherwise it lead to leakage due to gasket

wearing. Gasket must be replaced if it is damaged.


圈的防水效果,造成漏水。如果密封法兰损坏,必

6. Connect supply and turn on the water. Install the bolts into the bracket and tighten evenly. 连接供水管, 打开水源。



8. Install the seat. Use the supplied seat bolts and washers. Periodically check for leaks for several days following

安装盖板。使用附带的盖板螺栓和垫圈。安装后定期检 查漏水情况。



2210254-T1 -3-

IMPORTANT CONSUMER INFORMATION

CONSUMER RESPONSIBILITIES

If you live in a hard water area make certain that the holes in the toilet rim are kept clean to ensure proper bowl flushing. Toilet bowl cleaners should be used at least once a week. Use a long-handled brush to clean the rim holes, and to clean as far into the trap as possible to prevent mineral deposits from forming.

Most toilet bowl cleaners are not harmful to the vitreous china surface of the toilet bowl. Please follow the bowl cleaner manufacturer's instructions carefully.

Do not use abrasive cleaners or solvents.



WARNING: Risk of property or product damage. Do not use in-tank cleaners. Products containing chlorine(calcium hypochlorite)can seriously damage fittings in the tank. This damage can cause leakage and property damage.

Karat Company shall not be responsible or liable for any damage to these tank fittings caused by the use of cleaners containing chlorine(calcium hypochlorite).



Limited Warranty

CAUTION: Don't use any cement while installing the toilet. Heat expansion of the toilet may damage the feet of the toilet. Karat will not be responsible for any damage because of using cement.

-1-

如果你居住地方的水质是硬性,你必须保持冲水孔 清洁,令坐便器冲水正常。每星期应最少使用坐便器清 洁剂清洁一次,用长把手的刷子清洁冲水孔,并尽量伸 入排污管洗刷, 防止矿物质积聚。

大多数马桶清洁剂对坐便器表面是无害的。请认真 遵循马桶清洁剂制造商的指示来操作。

请勿使用腐蚀性清洁剂或溶剂。



警告: 提防楼宇受损或损坏产品。请勿使用水箱 内用清洁剂。含氯(次氯酸钙)的清洁剂会 严重破坏水箱配件,从而引起渗漏,或对 楼宇结构造成损坏。

我公司对此类因使用氯(次氯酸钙)而引致的水箱装 置损毁,概不负责。



警告: 在安装本坐便器时切勿使用任何水泥。因 为水泥的热膨胀可能使坐便器的脚部挤破 或损坏。卡丽对所有因为水泥安装而引起 的坐便器破裂恕不负责。

Karat warrants its product to be free of defects in material and workmanship during normal residential usage for three (3) years from date of purchase. This warranty only applies to Karat product purchased

and installed in mainland China. Karat will, at its election, repair, replace, or make appropriate adjustment where Karat inspection discloses any such defects occurring in normal use during the warranty period. Karat is not responsible for removal or installation costs. Damage caused by accident, misuse, or abuse is not covered by this warranty. Improper care and cleaning will void the warranty.* If this product is used commercially, Karat warrants the product to be free from defects in material and workmanship for one (1) year from the date of pur-

chase, with all other terms of this warranty applying

except duration. If you believe that you have a warranty claim, contact Karat through your Dealer, Plumbing Contractor, Home Center or E-tailer. Please be sure to provide all pertinent information regarding your claim, including a complete description of the problem, the product, model number, color, finish, the date the product was purchased and from whom the product was purchased. Also include your proof of purchase (original sales receipt). KARAT AND/OR SELLER ARE PROVIDING THESE WARRANTIES IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. KARAT AND/OR SELLER DISCLAIM ALL LIABILITY FOR SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES. This is Karat's exclusive written warranty.

有限担保

卡丽担保本产品在正常家用的情况下自购买之日起 三年内无材料及制造工艺上的瑕疵。本担保仅适用于 在中国大陆购买并安装的卡丽产品。

在上述三年担保期内,如经卡丽核查后发现产品在 正常家用的情况下存在瑕疵,卡丽将自行决定对产品 进行修理、更换、或是作适当的调整。卡丽不承担上 述成本以外的人工成本、拆除或安装的成本。由于意 外、过度使用或使用不当造成的产品损害不属于担保 范围之内。不适当的保养和清洁将导致担保无效。 如产品被用于商业目的,则卡丽担保该产品自购买 之日起一年内无材料及制造工艺上的瑕疵。除担保期 限以外,本担保的其他条款均适用。

为获得担保服务,请通过您的经销商、承包商、家 居中心或网络零售商联系我们。请确保提供所有相关 的信息,包括完整的问题描述、型号、颜色、表面镀 层、购买时间及销售方。请务必同时提供购买凭证 (原销售发票)。


在法律允许的范围内,卡丽及/或销售商提供此担保 以取代所有其他明示或默示的担保(包括但不限于产 品的适销性和适用于特定目的的担保),并且卡丽及/ 或销售商对任何特殊、附带或衍生性损害赔偿不承担

这是我们全部的书面担保。

MORRISTOWN DUAL FLUSH ONE-PIECE TOILET 305/400MMRI

卡丽 KARAT 维修零件图 SERVICE PARTS PAGE

WITH SOFT CLOSE SEAT 丽城双冲连体坐便器,305/400MM坑距 25952T-S-WK/25953T-S-WK

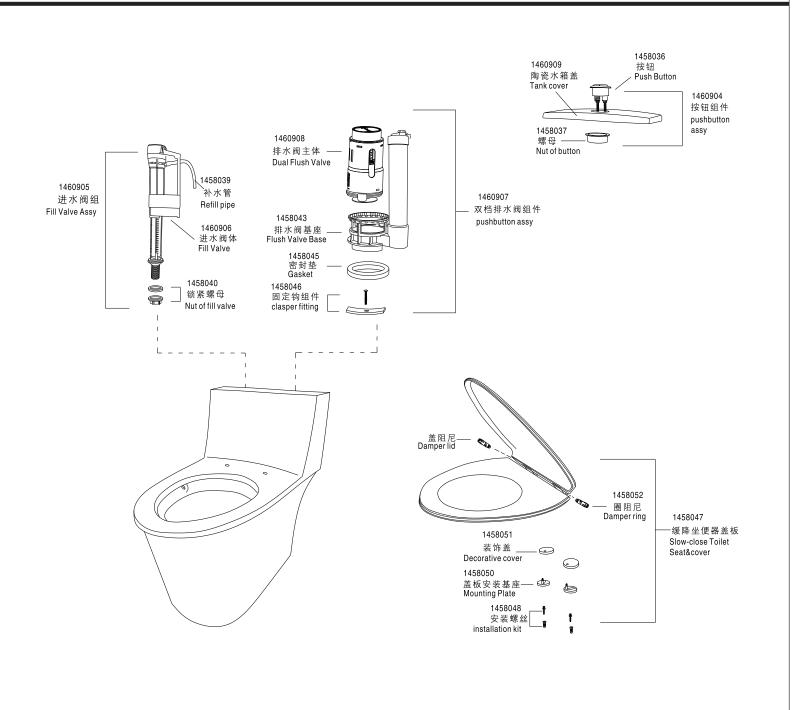

Shanghai Chehe Trading Co.,Ltd. Address: Floor 2, No.126,128,130 Jiang Chang San Road, Jing An District, Shanghai. Tel: 400-920-8262 Postcode: 200436

上海澈和贸易有限公司

地址:上海市静安区江场三路126、128、130号2层 电话: 400-920-8262

邮编: 200436

-4-2210254-T1