

卡丽 KARAT

安装说明书 INSTALLATION INSTRUCTIONS

墙面连接器 WALL-MOUNT CONNECTION 15607T-CP

BEFORE YOU BEGIN

Please read these instruction carefully familiarize yourself with the required tools, materials, and installation sequences. Follow the sections that pertain to your particular installation. This will help you avoid costly mistakes. In addition to proper installation, read all operating and safety instructions.

All information in these instructions is based upon the latest product information available at the time of publication. Karat reserves the right to make changes in product characteristics, packaging, or availability at any time without notice.

These instructions contain important care, cleaning, and warranty information, **please leave instructions for the consumer**

NOTES:

Flush the water supply pipes thoroughly to remove debris. The minimum inlet water pressure for the diverter is 0.05Mpa(0.5bar)

The highest working pressure for handspray is 0.5Mpa (5bars). If it exceeds 0.5Mpa(5bars), a pressure reducer is needed. The highest water and environment temperature is 60°C please keep handspray away from heater, or maybe damage it and hurt user.

安装之前

请仔细阅读说明书，熟悉所需工具、材料和安装顺序，参照相关章节完成您所需的安装，以避免昂贵的损失，除了正确的安装外，请详阅所有的操作和安全说明。

本说明书所含的一切资料均以印刷时所有的最新产品为准，卡丽公司保留权利随时更改产品特性、包装或供应情况，恕不另行通知。

本说明书也包含了有关保养、清洁及产品担保等重要信息，请交予用户保存。


注意事项:

一定要先彻底冲洗供水管以及清除管道中的杂质。切换阀正常工作的最小水压为：0.05Mpa(0.5bar)。

花洒最高工作水压为0.5Mpa(5bars)，水压超过0.5Mpa(5bars)时，需要安装减压阀。花洒最高工作温度及环境温度均为60°C。请特别注意，花洒需远离浴霸，否则可能损坏花洒，甚至对使用者造成伤害。


ROUGHING-IN

Unit:mm



尺寸图

单位: 毫米



INSTALLATION

1 HOW TO INSTALLATION THE WALL-MOUNT CONNECTION

to perform installation, installer must provide G1/2 female supply fittings, level and not extending beyond finished wall surface. Flush the water supply pipes thoroughly to remove any debris.


安装

1 安装墙面连接器

为使安装顺利，G1/2内螺纹管道配件应已经安装好，保持水平，不要凸出墙面，彻底清洗供水管，以清除供水管中的杂质。


Install the two offset connectors into the supply pipes.
Use appropriate thread sealants on pipe threads.

使用合适的螺纹密封膏安装墙面连接器。

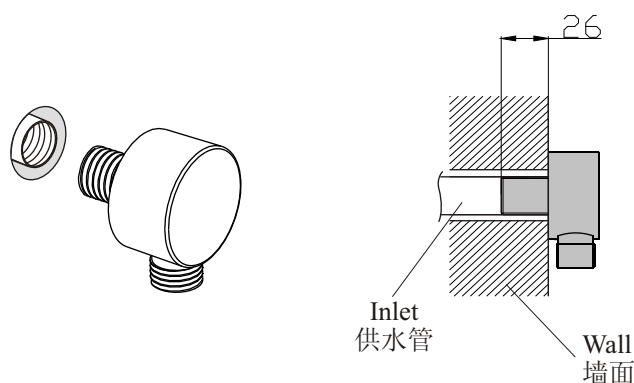

Connect shower hose to connect outlet and hand spray. Seal provide with hose must be installed in hose inlet end.

将垫圈安装在淋浴软管接进水一头，把淋浴软管一头接到墙面连接器出水口，另一头接花洒。

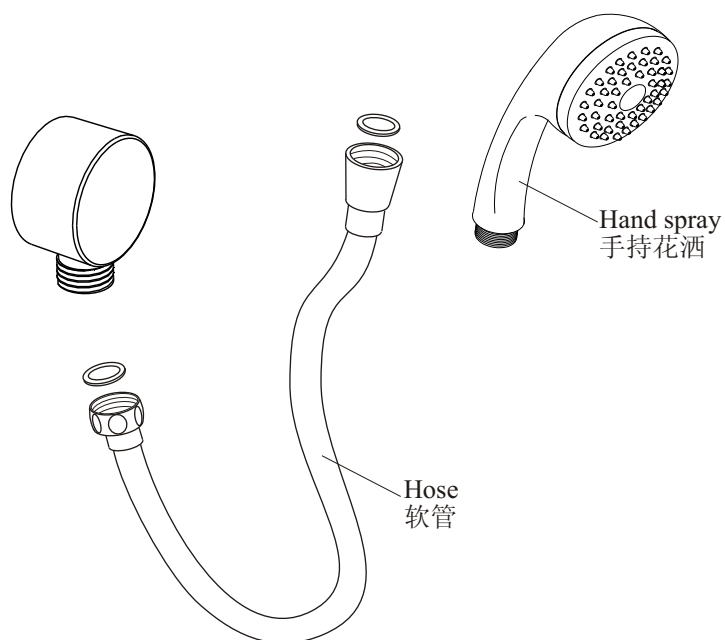

INSTALLATION CHECKOUT


安装后检查

Ensure that all coupling nuts are tight. Ensure that the lever handle is in the close position.
Turn on the main water supply, and check for leaks.
Repair as needed.

确保所有衔接螺母都已拧紧，确保手柄处在关闭的位置，开启主水源，检查是否有漏水，如有请重新拧紧。

Remove the hand spray. Run hot and cold water through the faucet for about a minute to remove any debris. Check for leaks. Remove any debris from the hand spray. Shut the faucet off, and reinstall hand spray.

取下花洒,把冷热水都打开,让水流出一分钟以清除杂质,检查漏水,关闭龙头,装回花洒。

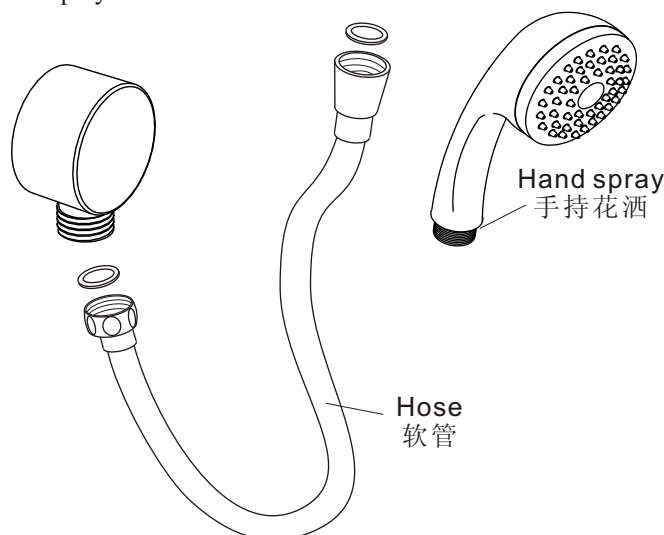

CLEANING INSTRUCTIONS

清理说明

All finishes : clean the finish with a mild soap and warm water. wipe entire surface completely dry with a clean soft cloth. Many cleaners may contain chemicals , such as ammonia chlorine, toilet cleaner etc., Which could adversely affect the finish and are not recommended for cleaning.

Don't use abrasive cleaner or solvents on karat faucets and fitting.

适用于所有加工处理过的表面:

以中性肥皂水清洗镀层表面,再以干净的软布彻底擦干整个表面。许多清洁剂,比如氨水、去污粉及洁厕灵等,会对电镀表面造成伤害,切勿使用。

有腐蚀性的清洁剂或溶剂不可使用于卡丽的水龙头及其附件上。

ONE -YEAR WARRANTY

一年有限担保

We warrant all other aspects of its connect to be free of defects of material and workmanship during normal residential use for one year. Our company will be responsible any problems caused by manufacturing defects provided with the invoice. Our company will,at its election ,repair ,replace or make appropriate adjustment where our company inspection discloses any such defects occurring in normal usage within warranty.

The warranty, including products, is limited clearly. Our company is not responsible for other damages appeared after the warranty. Also,the warranty dose not cover problems arising from labor charges,incorrect use and installation.

本产品自购买之日起,对正常使用下的制造和质料上的瑕疵提供一年的质量担保。

在质保期内,凭购货发票,我司将免费承担由制造质量引起的任何问题。经核查后,我司有权决定是修理、更改、还是做适当的调整。

这里的担保,包括产品都已明确地限制在该担保期内。本公司对以后出现的损坏不负有任何责任。担保也不包括外观损伤,使用不当及未按说明书安装造成的损失。

Shanghai Kohler International Trade Co., Ltd.,
Address: Room324, 2 Xinlin Rd,
Waigaoqiao Free Trade Zone, Shanghai
Tel: 021-26062000
Postcode: 200131

上海科勒国际贸易有限公司
地址: 上海市外高桥保税区新灵路106号2号楼324室
电话: 021-26062000
邮编: 200131