卡丽 KARAT

安装说明书 INSTALLATION INSTRUCTIONS

地漏 FLOOR DRAIN 31502T-CP

BEFORE YOU BEGIN

Please read these instruction carefully familiarize yourself with the required tools,materials,and installation sepuences. Follow the sections that pertain to your patticular installation. This will help you avoid costly mistakes. In addition to proper installation, read all operating and safety instructions.

All infromation in these instructions is based upon the latest product infromation available at the time of publication. Karat reserves the right to make changes in product characteristics, packageing, or availability at any time without notice.

These instructions contain important care, cleaning, and warranty information, please leave instructions for the consumer

NOTES:

- 1, Observe all local plumbing codes.
- 2, According to rough-in dimensions, drainpipe should be prearranged in the floor.
- 3,Do not install the floor drain while the ambient temperature

安装之前

请仔细阅读说明书,熟悉所需工具、材料和安装顺序,参 照相关章节完成您所需的安装,以避免昂贵的损失,除了 正确的安装外,请详阅所有的操作和安全说明。

本说明书所含的一切资料均以印刷时所有的最新产品为准,卡丽公司保留权利随时更改产品特性、包装或供应情况,恕不另行通知。

本说明书也包含了有关保养、清洁及产品担保等重要信息-请交予用户保存。


注意事项


- 1, 遵守当地管道安装条例。
- 2,根据安装尺寸,预留地下排水管。
- 3,环境温度低于零度请勿安装。

ROUGHING-IN

尺寸图

Unit:mm





INSTALLATION

安装

1 HOW TO INSTALLATION THE FLOOR DARIN

Adjust the drainage hole to make it fit with the floor drain completely, The floor drain should be installed a bit lower than the floor level

1 安装地漏

修整排水预留孔,使其与地漏完全吻合,安装时地漏 应略低于地面。



Please use scotch tape or other adhesives to seal the aperture around the floor drain after installation.

安装完毕后,务必用玻璃胶或其他粘合剂将地漏四周 的缝隙封严。



CLEANING INSTRUCTIONS

Rotate the floor drain cover and remove the cover, pull out the filter and clean up the garbage.

Install the filter and cover in turn.

All finishes: clean the finish with a mild soap and warm water. wipe entire surface complately dry with a clean soft cloth. Many cleaners may contain chemicals, such as ammonia chlorine, toilet cleaner etc., Which could adversely affect the finish and are not recommended for cleaning.

Don't use abrasive cleaner or solvents on floor drain and fitting.

清理说明

旋转地漏盖子并取下盖子, 拉出过滤网, 清理垃圾。

依次装回滤网及盖子。

适用于所有加工处理过的表面: 以中性肥皂水清洗镀层表面,再以干净的软布彻底擦干整 个表面。许多清洁剂,比如氨水、去污粉及洁厕灵等,会 对电镀表面造成伤害,切勿使用。

有腐蚀性的清洁剂或溶剂不可使用于地漏及其附件上。

ONE-YEARS WARRANTY

Our company provides one years warranty for its drain Our company will, at its election, repair, replace or make appropriate adjustment where our company inspection discloses any such defects occurring in normal usage within warranty.

The warranty, including products, is limited clearly. Our company is not responsible for other damages appeared after the warranty. Also, the warranty dose not cover problems arising from labor charges, incorrect use and installation.


一年有限担保

本产品自购买之日起,在正常使用下我司将提供一年的质量担保,经核查后,我司有权决定是修理、更改、还是做适当的调整。

这里的担保,包括产品都已明确地限制在该担保期内。本公司对以后出现的损坏不负有任何责任。担保也不包括外观损伤,使用不当及未按说明书安装的损失。

地漏 FLOOR DRAIN 31502T-CP

长丽 KARAT。 维修零件图 SERVICEPARTSPAGE

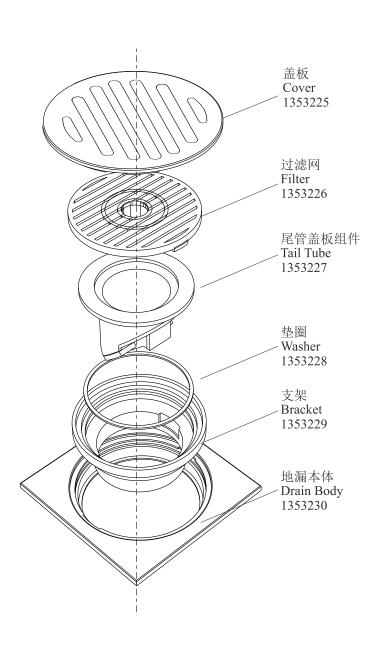

Shanghai Kohler International Trade Co., Ltd. Address: Room 324, 2 Xinlin Rd, Waigaoqiao Free Trade Zone, Shanghai Tel: 400-920-8262

Postcode: 200131

上海科勒国际贸易有限公司 地址:上海市外高桥保税区新灵路106号2号楼324室 电话: 400-920-8262 邮编: 200131