卡丽 KARAT®

安装说明书 INSTALLATION INSTRUCTIONS

爱维落地式浴缸淋浴龙头
IVY FLOOR-MOUNT BATH & SHOWER FAUCET
12170T-CP

BEFORE YOU BEGIN 安装之前

- Please read the instructions carefully
- Please give the instructions to the end customer after installation
- The shape and components of the product do not necessarily comply with the illumination which is only for your reference.
- Please purchase a suitable and usable connecter
- It is recommended that the customer invite professionals for the installation
- Get these tools at hand: adjustable wrench, screwdrivers, thread sealant, pliers, electric hammer and etc.
- The following pictures for your reference do not necessarily comply with the products. Please contact the seller or Shanghai Kohler International Trade Co. Ltd. if you have any question related to installation.
- 请详细阅读本说明书
- 安装完毕后，请务必将本说明书交给最终客户
- 产品外形及所包含的配件以实物为准，示意图仅供参考
- 请购买一个正确且有效的连接装置
- 建议客户请专业的安装人士安装
- 准备以下工具：活动扳手，螺丝刀，密封胶带，钳子，电锤等
- 以下图例安装步骤仅供参考，一切以所购买实物为准，如遇到不清楚之处，请联系您的销售商或联系上海科勒国际贸易有限公司

NOTE

1.This product had been checked and adjusted by factory; please don't take it apart by yourself.
2.Work pressure commanded: 0.05Mpa~0.75Mpa

注意事项

1. 本产品已经出厂检测及调试，请勿自行拆卸。
2. 推荐工作压力 0.05Mpa~0.75Mpa

INSTALLATION EXPOSITION

1.Position your desired installation area and dig out groove for inlet body and hot and cold supplies as illustrated.

2.Fix the prelaid inlet body in the groove with self-tapping screws and plugs and connect both hot and cold supplies. **Turn on the supply and check all connections for leaks. Then fill concrete and finish the surface.**

3.Slide two escutheon cap onto the faucet body, then connect the faucet with prelaid inlet body.Gasket MUST be filled between the faucet connecting nut and prelaid inlet body. Tighten the connecting nut with spanner and ensure it is fully tightened.

4.Connect the showerhead, faucet body and inlet hose.

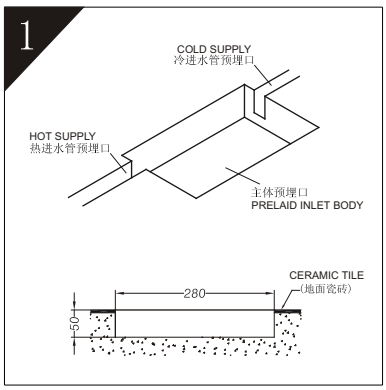

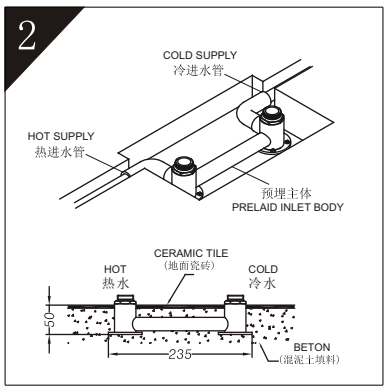

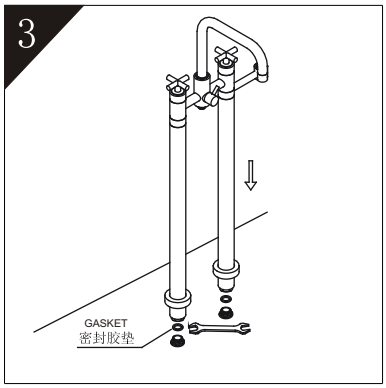

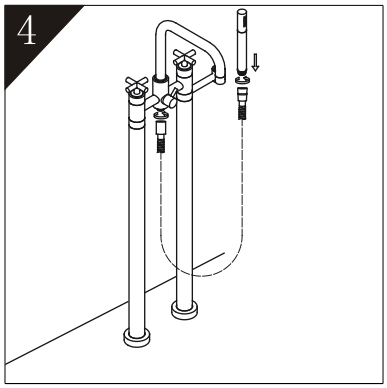

安装说明

1. 如图，在龙头安装位置开挖进水主体预埋口以及冷热进水预埋管路。

2. 把预埋主体用自攻螺钉和胶粒固定在预埋口内，并接上冷热进水管。**然后开通水源，确保各连接处无渗漏，最后再填料封盖。**

3. 把两个装饰盖套到龙头主体上，然后把龙头连接到预埋好的进水主体上, 在龙头连接螺母和预埋主体之间必须装上密封垫片，用扳手拧紧连接螺母确保牢固。

4. 连接花洒，龙头主体，软管。

HOW TO USE

1.Rotate the left handle to control the stream of hot water and rotate the right handle to control the stream of cold water .
2.Rotate the left handle counterclockwise to turn on the hot water and vice versa.Rotate the left handle clockwise to turn on the cold water and vice versa.
3.The middle handle is the switching control valve. Rotate it clockwise to to let the water run out from showerhand while rotate it counterwise to let the water run out from the spout.



Note: Do not use the faucet under high temperature since some of its inner components contain temperature-unstable substances, such as silicone sealant.Do not use the faucet for a long time if the water temperature is below 90℃.



使用方法

1. 左把手控制热水，右把手控制冷水。
2. 逆时针旋转左把手为开启热水，反之为关水。顺时针旋转右把手为开启冷水，反之为关水。
3. 中间手柄为转换控制阀，顺时针调节为手握花洒出水，逆时针调节为出水嘴出水。

注意： 龙头内部结构含有硅胶等不耐高温成份，请勿在高温环境下使用，请勿在超过90℃的水温下长时间使用。



TEST RUN THE WATER

Check connections and plumbing for leak and the integral installation for tightness after you complete the installation job.
Test run the water to check connections for leak after you have confirmed all components run properly.

试水

装后请检查各连接处是否连接紧密、管道是否有泄漏，整体安装是否牢固。确定各部良好后，可放水试用，检查旋接处是否漏水。

NOTE AFTER INSTALLATION

1 Clean the surface of the shower column with soft towels
2 Open water supply after installation and operate it for two or three times and check for any possible leakage at all the joints. See if the column functions normally.

安装完毕注意事项

1 用软毛巾将淋浴柱表面进行清洁。
2 安装完毕后请开启水源，操作2至3个来回，检查各连接处有无漏水，并检测各项功能是否正常.

CLEANSING AND MAINTENANCE

1 Please do not use rough abrasive or polisher to cleanse the faucet surface while soft cloth with water and neutral detergent is preferred.
2 Do not use hard tools or corrosive detergents to cleanse the faucet to avoid damage.

清洁与维护

1 清理淋浴柱表面污垢时，请不要用粗糙的研磨剂或抛光剂来清洗，请用软布沾清水加中性清洁剂擦拭即可。
2 勿用坚硬的工具和强腐蚀性的清洁剂对龙头进行清洗，否则会对龙头造成伤害。

FIVE-YEARS WARRANTY

* Our company provides five years warranty for its faucets to be leak and drip free during normal residential use. We also warrant all other aspects of its faucets to be free of defects of material and workmanship during normal residential use for one year. Our company will be responsible any problems caused by manufacturing defects provided with the invoice .Our company will, at its election ,repair ,replace or make appropriate adjustment where Our company inspection discloses any such defects occurring in normal usage within warranty .

* The warranty, including products, is limited clearly. Our company is not responsible for other damages appeared after the warranty. Also, the warranty does not cover problems arising from labor charges, incorrect use and installation.

5年有限担保

* 本产品自购买之日起，在正常使用下任何由阀芯造成的龙头滴漏现象，我司将提供长达5年的质量担保，同时对正常使用下的龙头制造和质料上的瑕疵提供1年的质量担保。在质保期内，凭购货发票，我司将免费承担由制造质量引起的任何问题。经核查后，我司有权决定是修理，更改，还是做适当的调整。

* 这里的担保，包括产品都已明确地限制在该担保期内。本公司对以后出现的损坏不负有任何责任。担保也不包括外观损伤，使用不当及未按说明书安装的损失。

Shanghai Kohler International Trade Co., Ltd.
Address: Room 324, 2 Xinlin Rd,
Waigaoqiao Free Trade Zone, Shanghai
Tel: 021-26062000
Postcode: 200131

上海科勒国际贸易有限公司
地址：上海市外高桥保税区新灵路106号2号楼324室
电话： 021-26062000
邮编： 200131
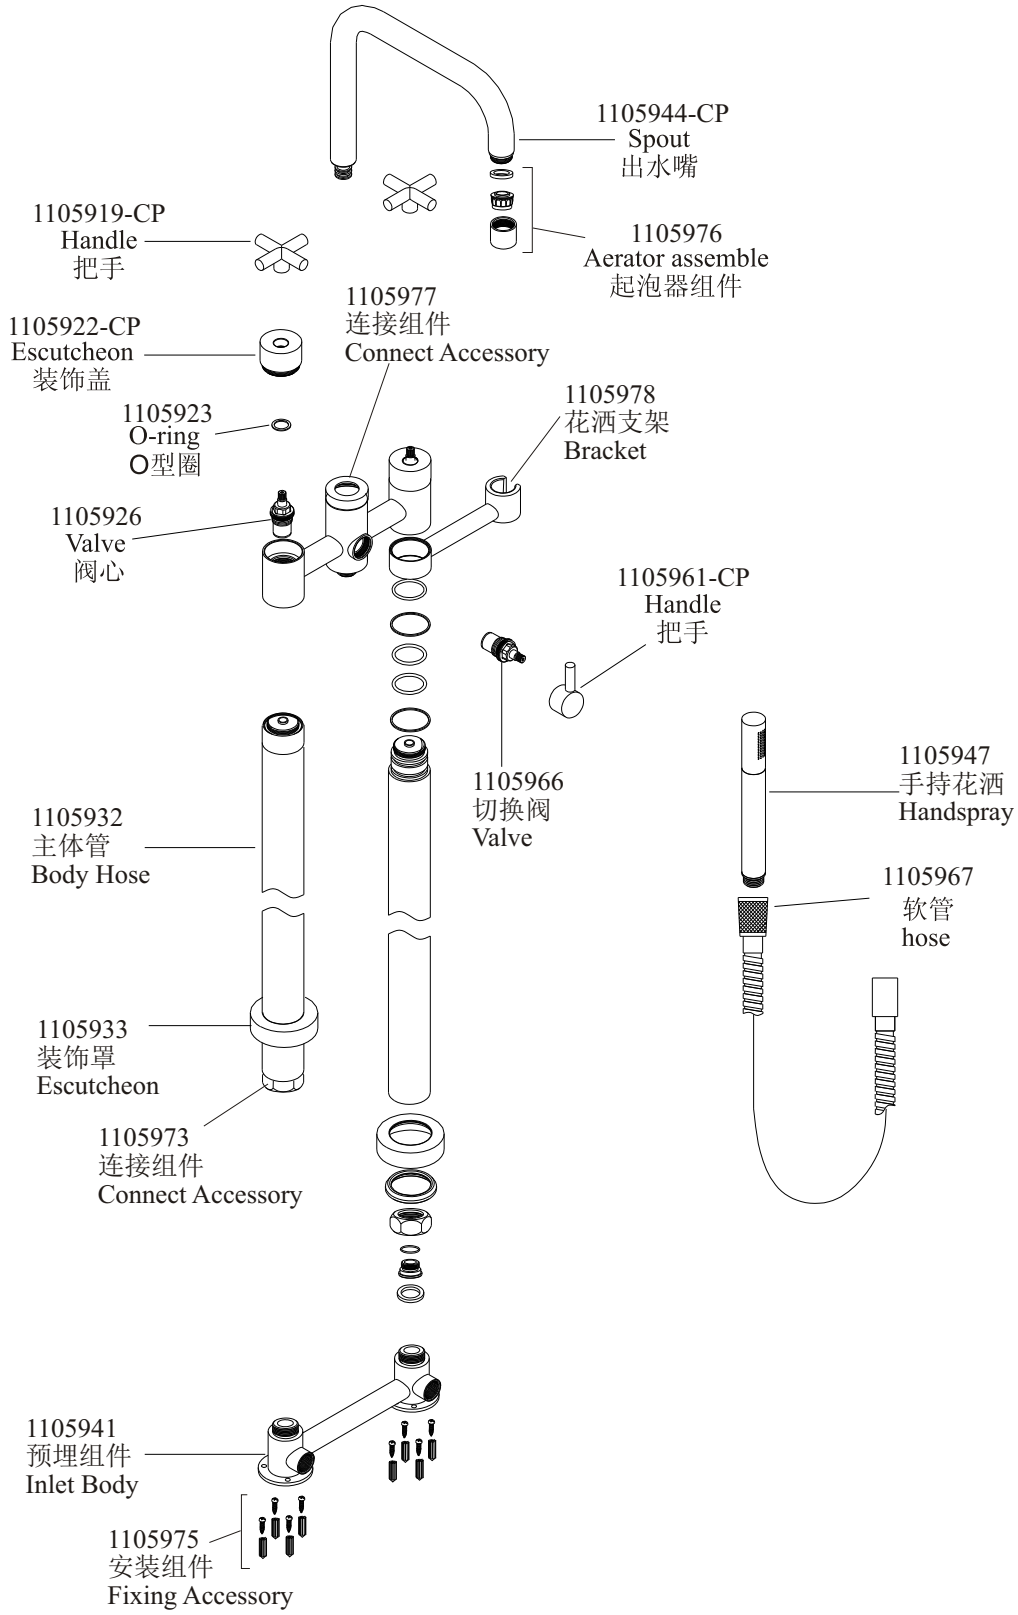
爱维落地式浴缸淋浴龙头
IVY FLOOR-MOUNT BATH & SHOWER FAUCET
12170T-CP